

# EASY TRANSITION TO NETWORK WORLD!

**EXCELLENT RECORDING PERFORMANCE** 



## LE2104 LE2104D

ANALOG 4CH DVR

H.264, CIF Real Time

LE2104



### **FEATURES**

- Stable embedded Linux operating system.
- Small Files Sizes by H.264 Compression
- Various Recording Resolutions (D1, Half D1, CIF)
- Real-Time Recording @ CIF
- Event Data Protection by Event Partition Recording
- Pre-Alarm Recording (Up to 1 minute)
- Automatic Backup by Schedule
- Multiplex (Live/Playback, Recording, Backup, Networking)
- Time and Date Sync from NTP Server

### LE2104 / LE2104D

### Analog 4CH DVR
















### **SPECIFICATIONS**

	Input Output	Analog Camera	4		
	Output				
Audio		Loop Through	4		
Audio		Composite	1 ea		
Audio		VGA   Spot	1 ea   1 ea		
Addio	io Input   Output		4 ea   1 ea		
Alarm	Input   Output		16ea   4 ea		
Notification to rea		mote PC	Yes		
	Frame Rate (/sec) NTSC		Up to 120 fps @ 352x240 Up to 60 fps @ 704x240 Up to 30 fps @ 704x480		
	Frame Rate (/sec) PAL		Up to 100 fps @ 352x288 Up to 50 fps @ 704x288 Up to 25 fps @ 704x576		
	Quality Level		5 Levels		
	Recording Mode		Continuous, Alarm, Motion, Instant		
Search	Playback Function		FF, FB, Frame Advance		
	Search Mode		Date/Time, Event (Motion, Alarm), Bookmark		
Display	Frame Rate (/sec) NTSC   PAL		120 fps   100 fps		
	Division Mode		1,4		
Storage	Internal HDD Interface Type		SATA		
		Max. Capacity	Up to 2 HDDs	Up to 1 HDD	
	External HDD Interface Type		USB		
	Internal ODD		-	Yes	
Backup	Backup Interface		3 x USB 2.0, Network		
	Supportable Devi	ce	Memory Stick, External ODD, HDD	Memory Stick, Internal / External ODD, HDD	
Serial I/F	PTZ Control				
Network	Network Connection		Ethernet 10 / 100M, RJ-45, DDNS, TCP-IP		
	Network NTSC Transmission Speed PAL		Up to 30 fps @ 352x240 Up to 25 fps @ 352x240		
	NTP (Network Time Protocol)		Yes		
	Bandwidth Control		Yes		
Security	User Level Management		Yes		
	Data Integrity Ch	eck (Watermark)	Yes		
Power Source   Power Consumption		tion	DC 12V / 60W Adapter   40 W (w/ HDD x 2)		
Operating Temperature / Humidity		ity	0°C ~ 40°C / 0% ~ 80%RH		
Dimension (W x D x H) mm			430 x 346.8 x 54		
Net Weight (w/o HDD) (kg)			2.7		

<sup>•</sup> Exact products and specifications shown may vary by geographic region and are subject to change without notice. Actual products may differ from the images appearing in the catalog.

### DIMENSION (Unit: mm)

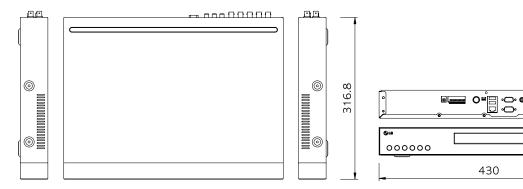



Phone: +82-2-3777-5184

Home Entertainment Company The eco-friendly label is attached to those products which have passed LG Electronics' rigorous environmental criteria that Security Overseas Marketing Team evaluate 6 hazardous materials (lead, mercury, cadmium, etc.) LG Twin Towers, 20 Yeouido-dong, Yeongdeungpo-gu, Seoul 150-721, Korea

